


MODULE VARIO30 27.5x495

- Special module ending for continuous line of light
- 2 independent channels: optional color temp., tunable white
- Easy and fast interconnection with WAGO terminal blocks (see ①)
- Easy installation with double sided thermal tape
- Optimized length - luminaires 0,5 m multiples long
- Divisibility of one module to 82.5, 165, 247.5, 330, 412.5 or 495 mm
- 70 µm thick copper layer allows up to 3 m long line
- Warranty 5 years + insurance against damage

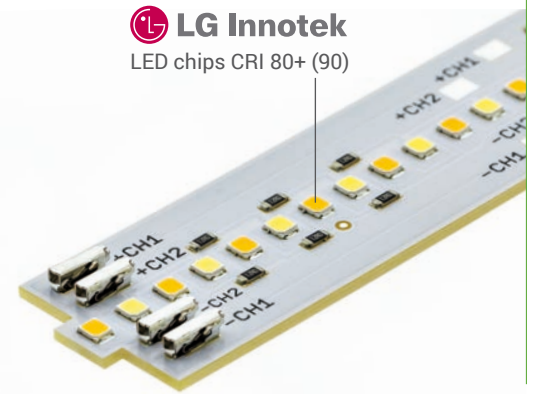




TECHNICAL PARAMETERS

dimensions	27.5 x 495 mm
driving	24 VDC
power	14,5 W/channel
efficacy	up to 138 lm/W
max. line length	3 m (6 modules)*
number of LEDs	42 (42 + 42 Tunable White)
LED package	LG 3528 B105N
warranty	5 years + insurance

* Flux drop max. 20%


ORDER CODES

Modul VARIO30 27,5x495 827 42LG 24V	2700 K	1850 lm	00216695
Modul VARIO30 27,5x495 830 42LG 24V	3000 K	1900 lm	00215226
Modul VARIO30 27,5x495 840 42LG 24V	4000 K	2000 lm	00215205
Modul VARIO30 27,5x495 865 42LG 24V	6500 K	2000 lm	00216696
Modul VARIO30 27,5x495 827-865 2x42LG 24V	Tunable	max. 2000 lm	00213837

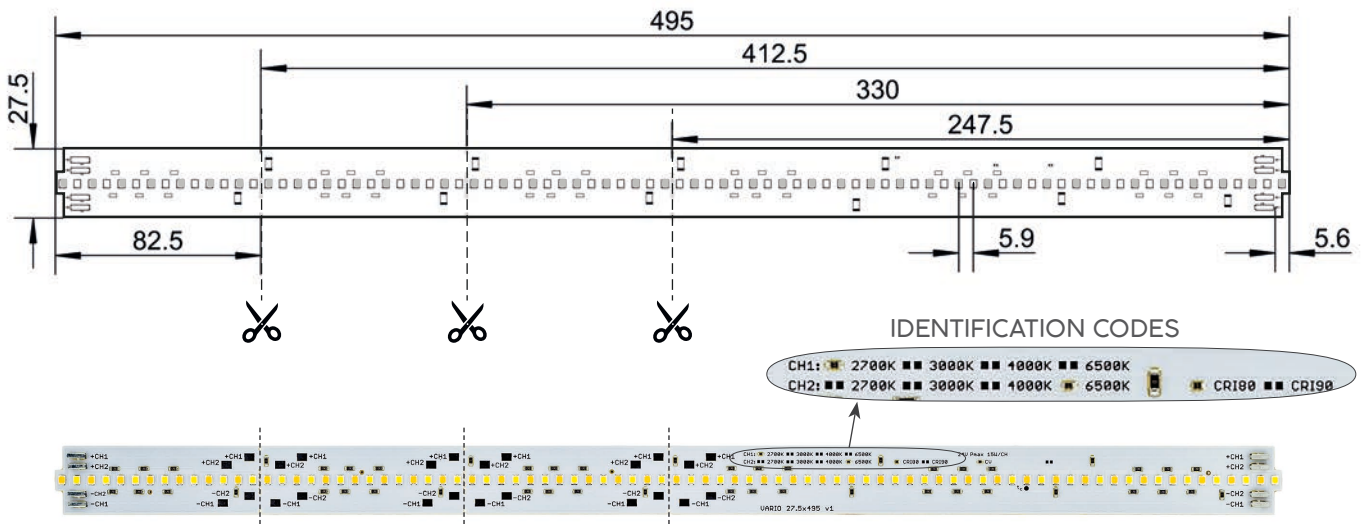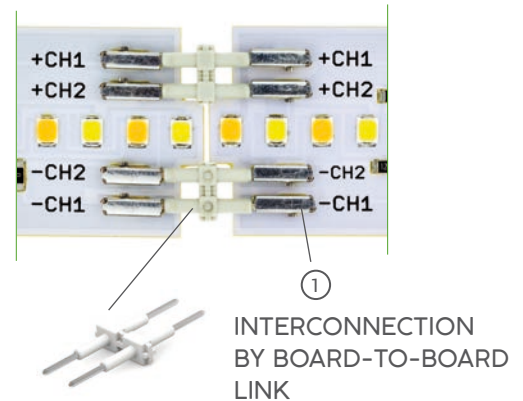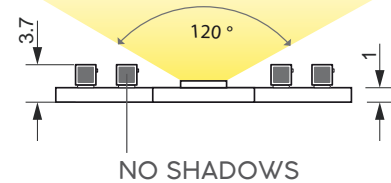

ACCESSORIES

LED DRIVERS - can be hidden inside the luminaire

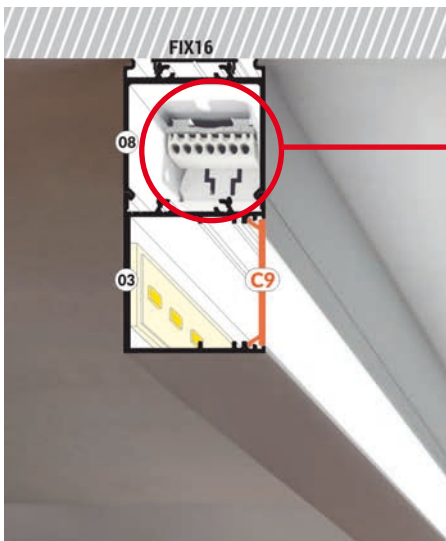

LC 100W 24V LP SNC

360 x 30 x 21 mm


00212051

LC 60W 24V LP SNC

280 x 30 x 21 mm

00214125

EXAMPLE (module in profile VARIO30-01)

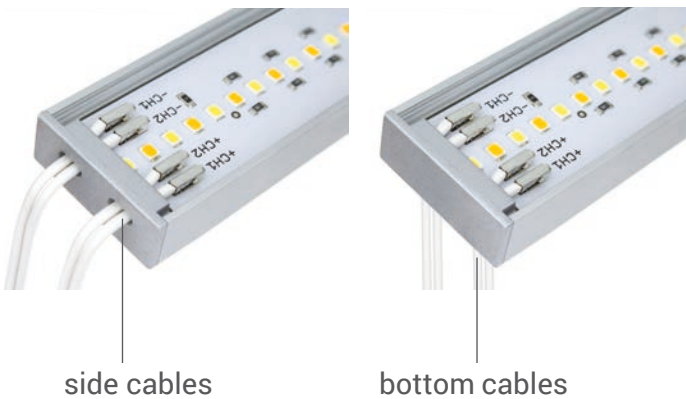

WAGO ACCESSORIES




Board-to-board link

00209213

Operating tool
(allows to release wire from
WAGO terminal block)

00214196

ALUMINIUM LED PROFILES - TOPMET SYSTEM VARIO30

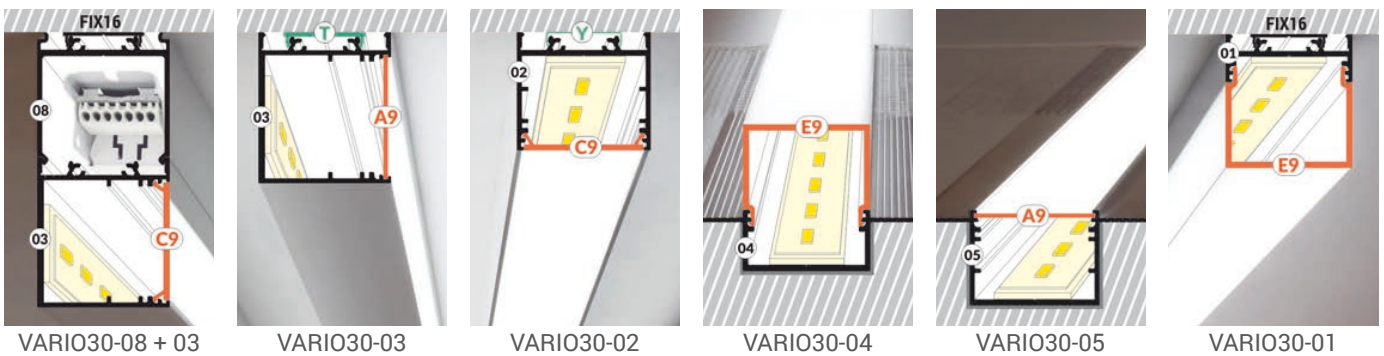

VARIO30-08 + 03

VARIO30-03

VARIO30-02

VARIO30-04

VARIO30-05

VARIO30-01

For more information see www.vario30.cz