




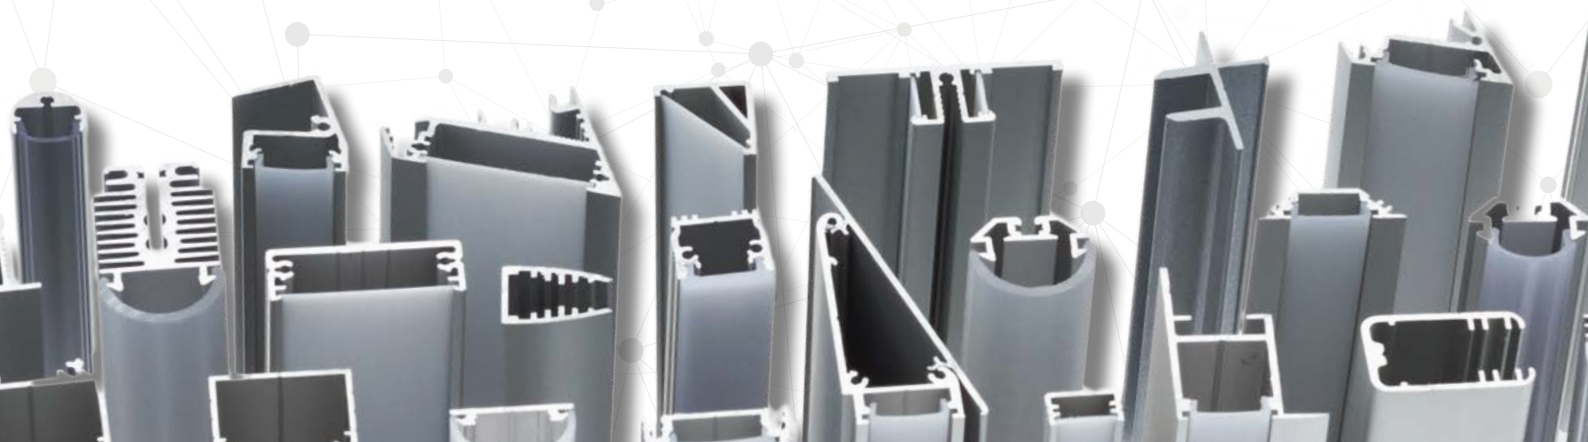

SOLUTION FOR LED LIGHTING

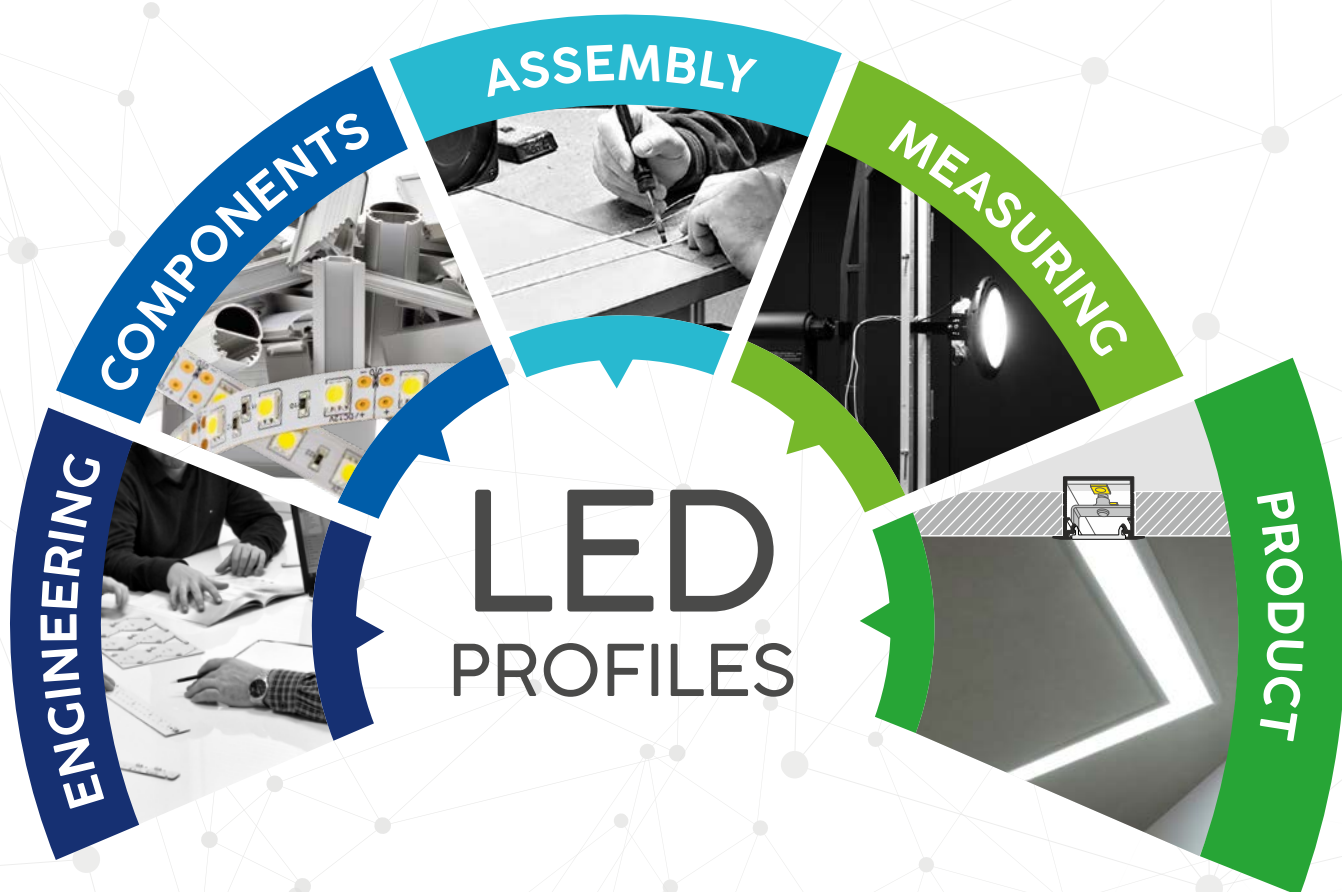

FURNITURE

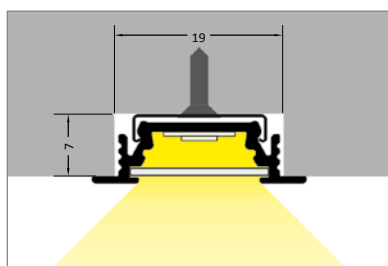

LED ribbon

120 OPTIMUM CW

00201670

LED profile


GROOVE10 anodized

00209997





BATHROOM

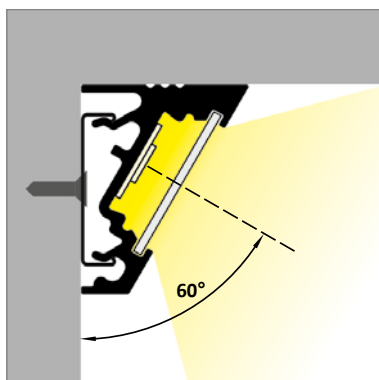

LED ribbon

120 OPTIMUM CW


3x layer of protective
lacquer

00201670

LED profile


CORNER10 anodized

00209898

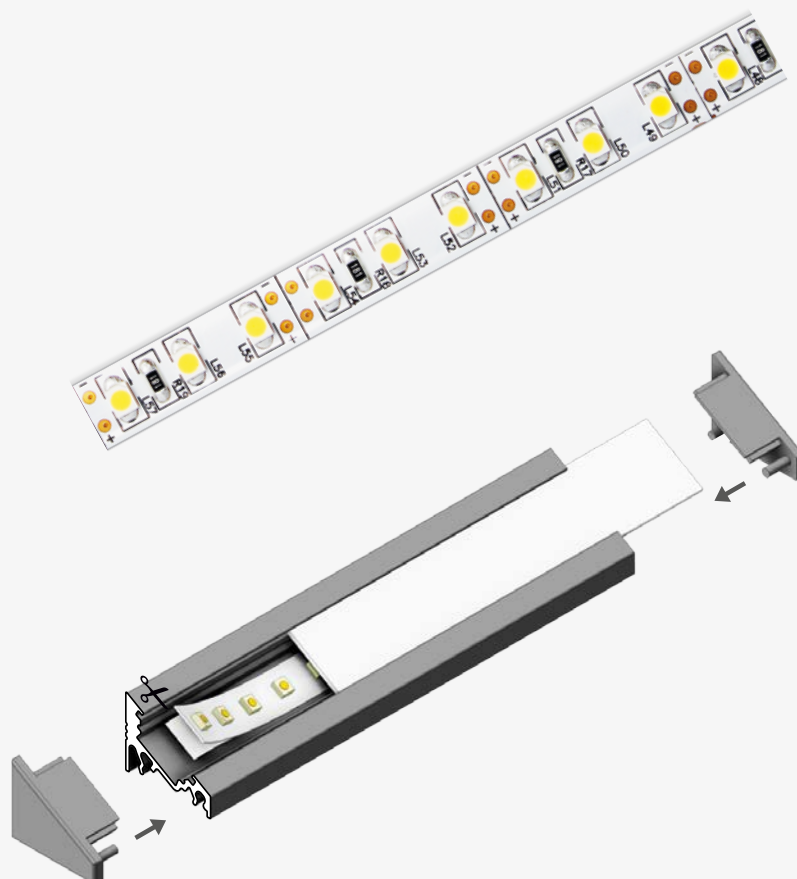



INTERIOR

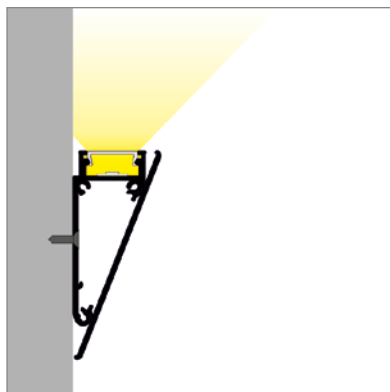

LED ribbon

120 OPTIMUM NW

00203371

LED profile


WALLE anodized

00210206





EXTERIOR

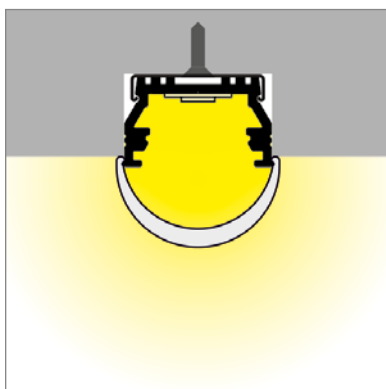

LED ribbon


60 RGB

00200169

LED profile


UNI12 anodized

00210143

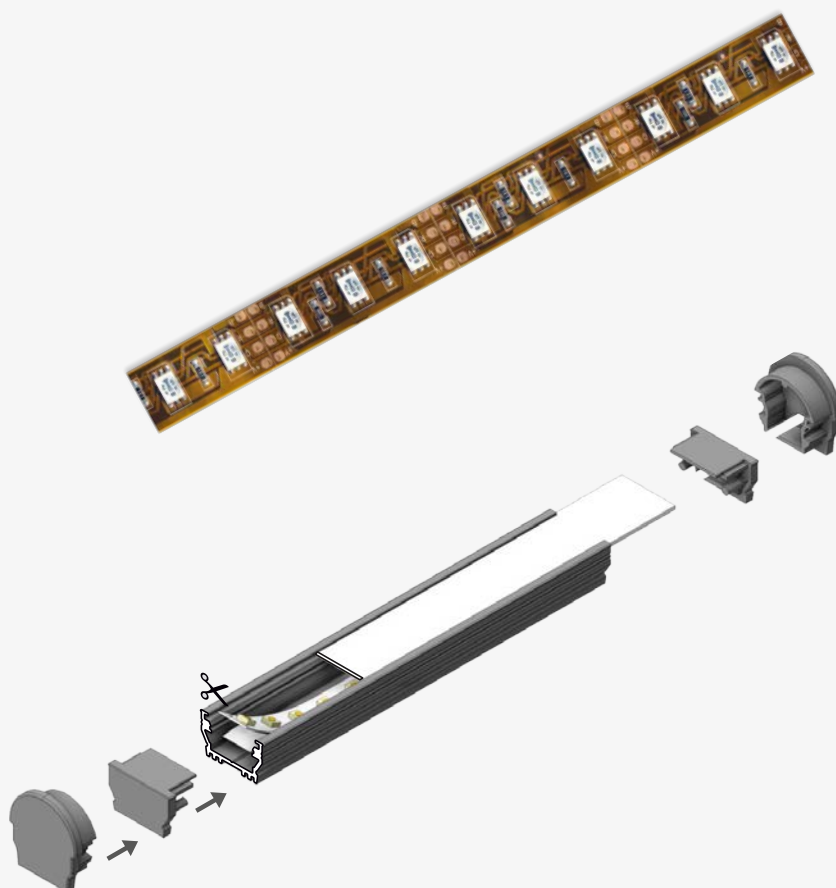



INDUSTRY

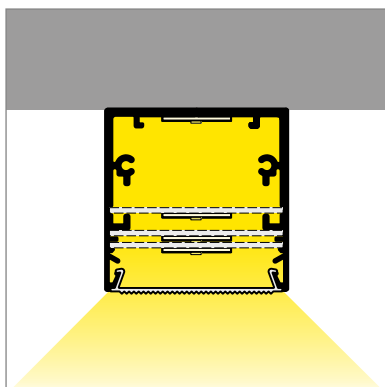

LED module

50x560 2x32 LED

00207896

LED profile


PHIL53 anodized

00210062





RETAIL

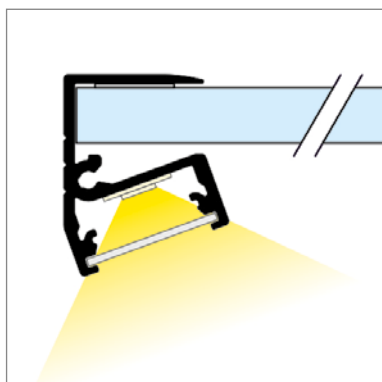

LED ribbon


60 PROFI CW

00202030

LED profile


EDGE10 anodized

00209949

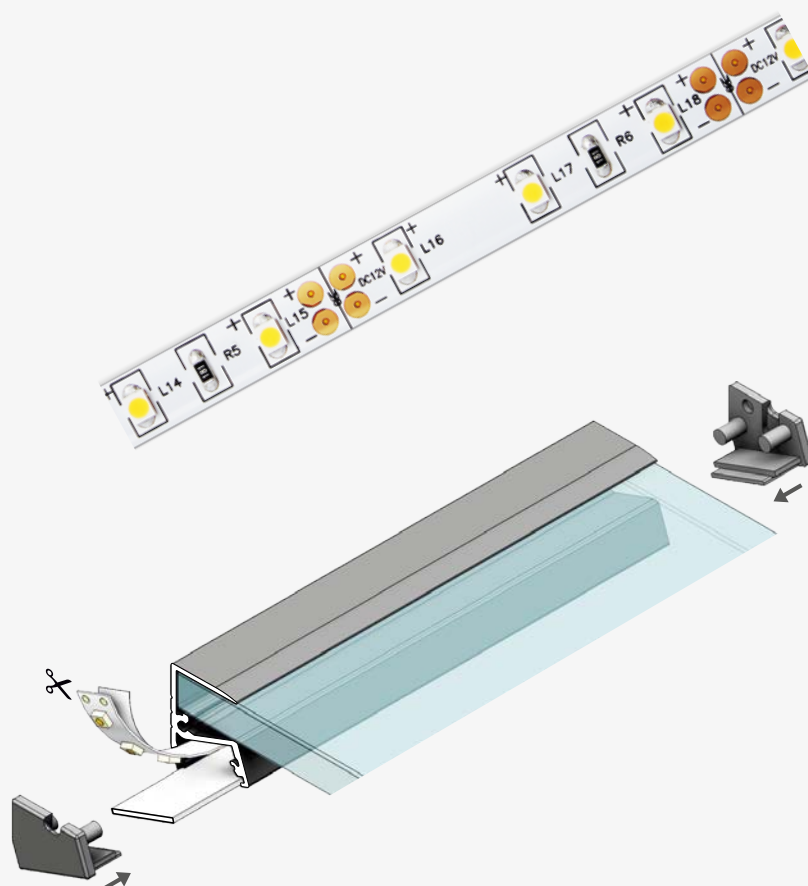



OFFICE

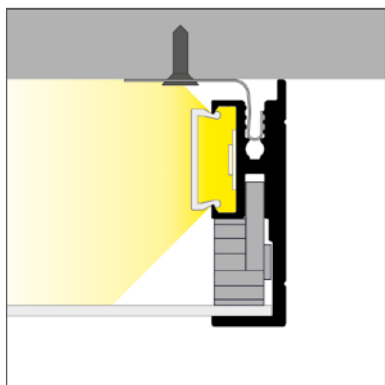

LED ribbon


112 PROFI LG CURRENT CW

00205191

LED profile


AMBI12 anodized

00209843

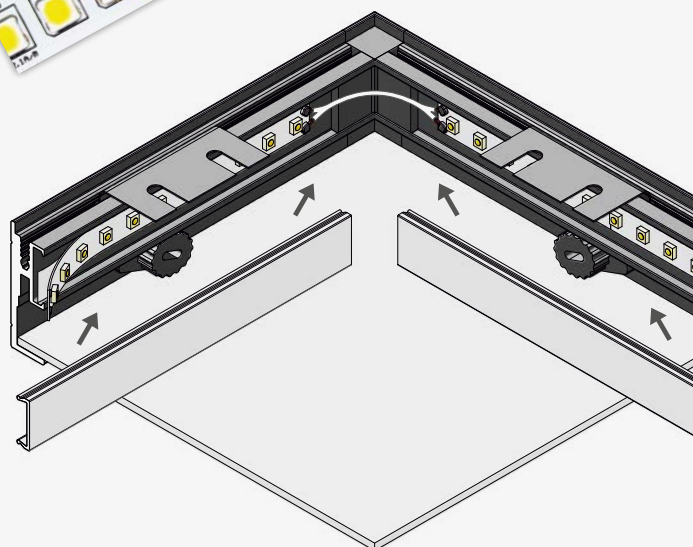



AD SIGNS

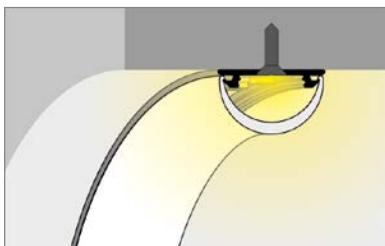

LED ribbon

120 PROFI CW

00202040

LED profile


ARC12 anodized

00209848




LED profiles - overview


SURFACE

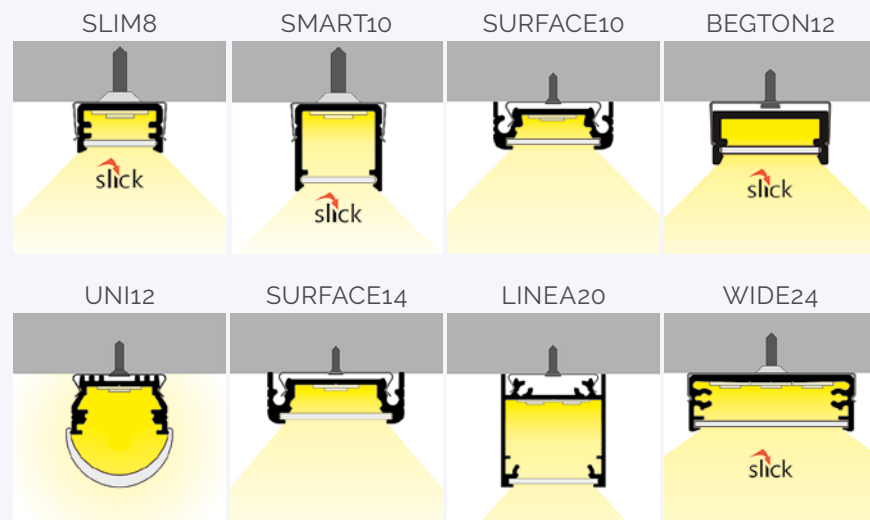


RECESSED

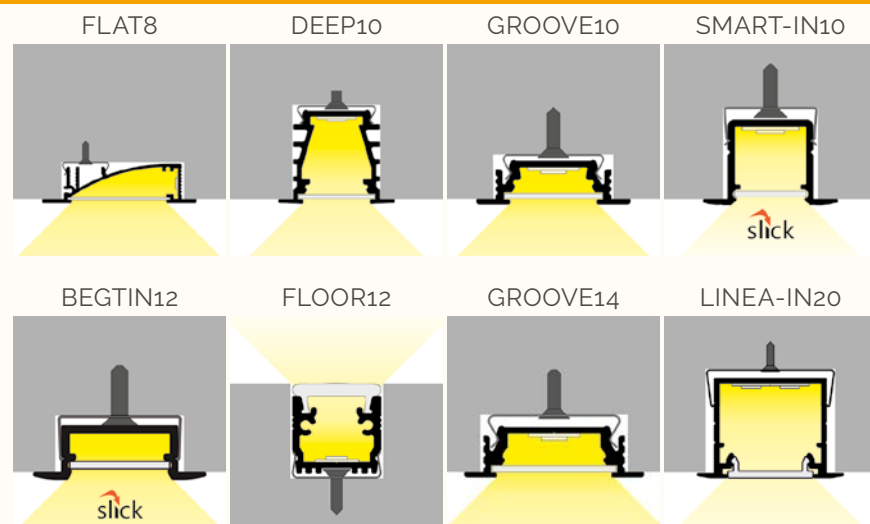


CORNER

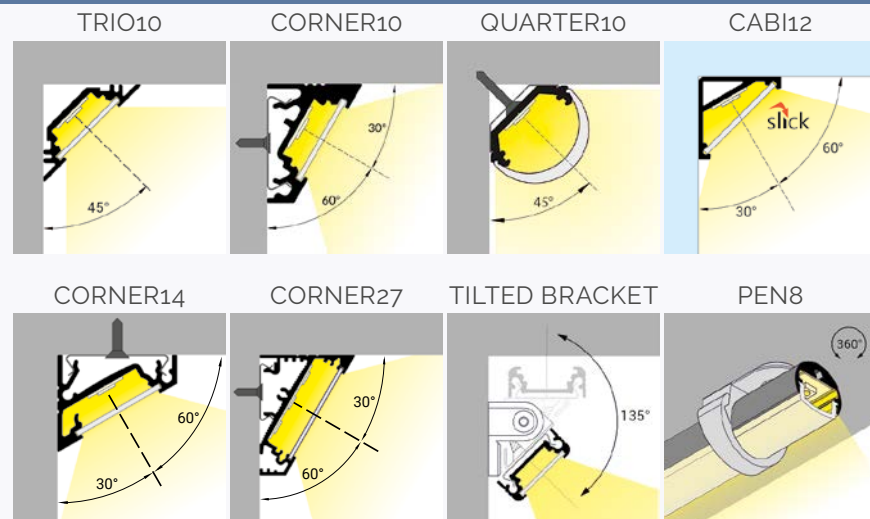


VARIO

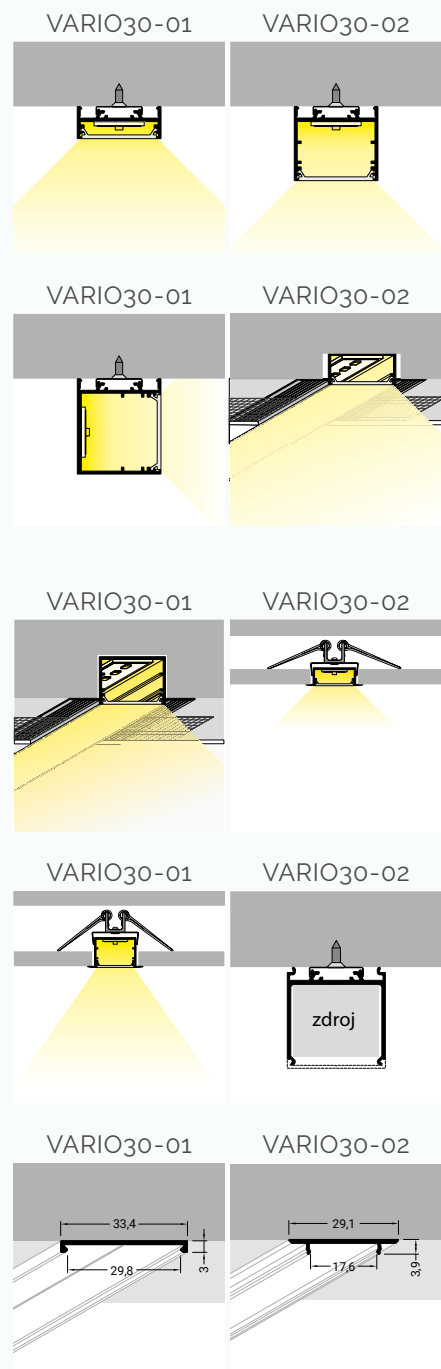


SPECIAL

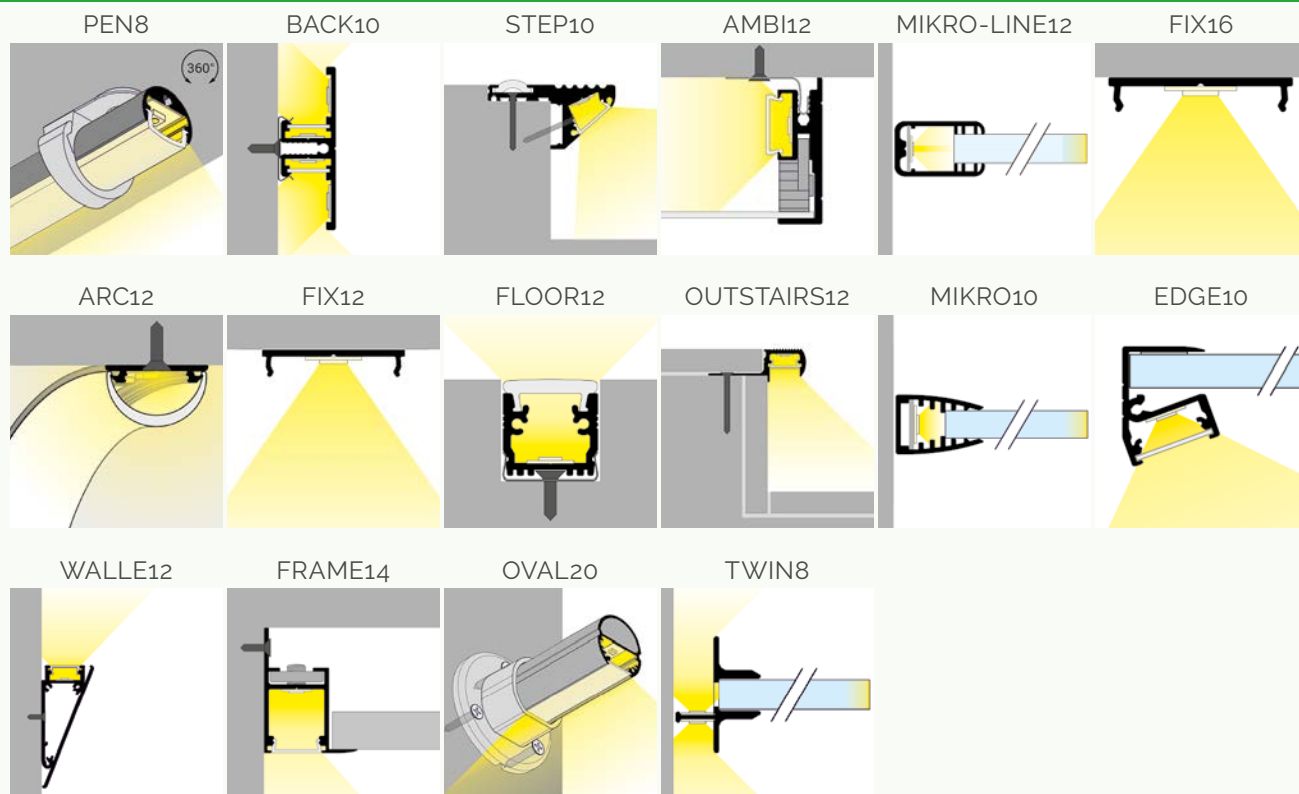

TRON

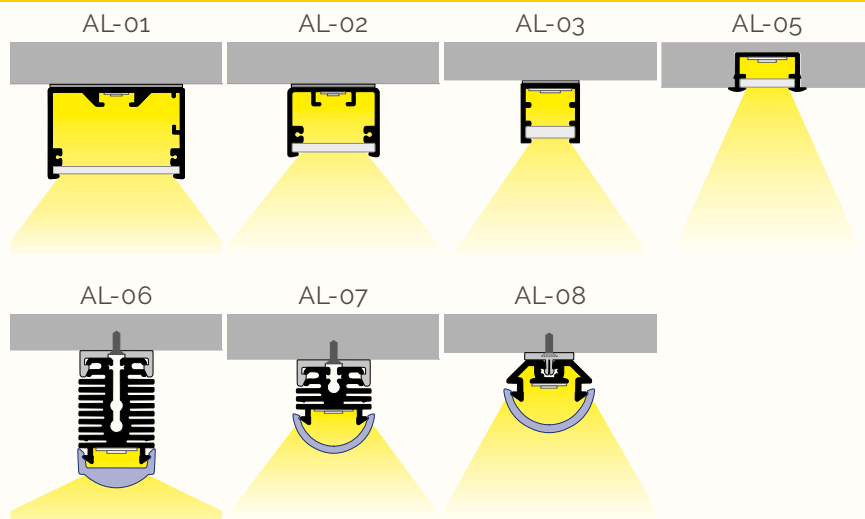

PHIL

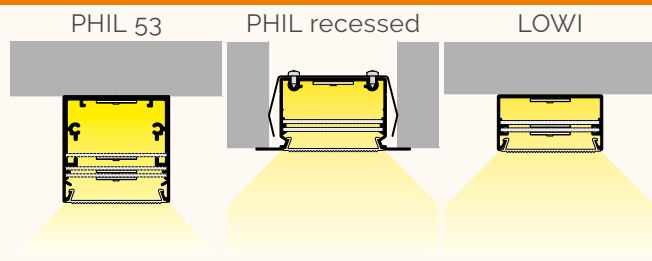

... and many
more

Light sources - overview

LED ribbons 12 V

suitable for minor interior and exterior applications

30 / 60 / 120 LEDs/m

Cool white, neutral white, warm white, RGB

LED 5152 / 3528 / 5060



up to 128 lm/W

LED ribbons 24 V

suitable for extensive interior and exterior applications

56 / 112 / 224 LEDs/m

Cool white, neutral white, warm white, tunable white

LED 3528



up to 150 lm/W

LED ribbons - constant current

the highest possible luminosity, lower thermal load, suitable for more sophisticated linear luminaires

112 LEDs/m

Cool white, neutral white, warm white

LED 3030



up to 170 lm/W @1A/m

Hybrid LED ribbons

CV solution with the highest efficacy

70 LEDs/m

Cool white, neutral white, warm white

LED 5630



up to 150 lm/W


LED modules

CV and CC types, optional emergency channels

Parameters according to the needs of customer

Cool white, neutral white, warm white

LED 5630 / 2835 / 3030

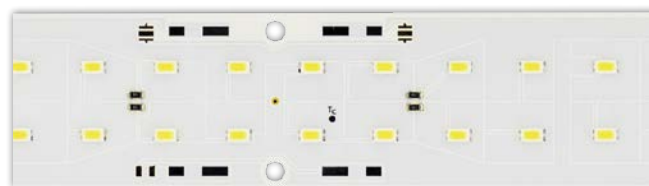

up to 180 lm/W



TRON ELEKTRONICKÉ SOUČÁSTKY, s. r. o.

Karásek 1 J, 621 00 Brno-Řečkovice, Czech Republic

+420 541 420 720 | info@tron.cz | www.tron.cz

TRON,
YOUR CZECH MATE



EUROPEAN UNION
European Regional Development Fund
Operational Programme Enterprise
and Innovations for Competitiveness

MADE IN EU

WWW.TRON.CZ