


LED MODULE TOPMET LINEA20

- Linear LED module designed for LED profile luminaries
- Single channel - optional color temperature
- Easy and fast interconnection with WAGO terminal blocks (see ①)
- Easy installation with double sided thermal tape
- Optimized length - luminaires 0,5 m multiples long
- Divisibility of one module to 82.5, 165, 247.5, 330, 412.3 or 495 mm
- 70 µm thick copper layer allows up to 3 m long line
- Warranty 5 years + insurance against damage

LG Innotech
LED chips CRI 80+ (90)

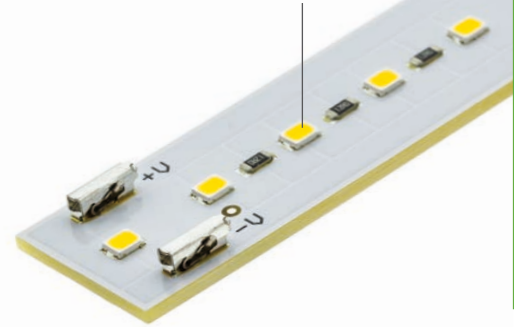

TECHNICAL PARAMETERS



dimensions	20 x 495 mm
driving	24 VDC
power	14,4 W
nominal flux	2000 lm*
efficacy	138,1 lm/W
max. line length	3 m (6 modules)**
number of LEDs	42
LED package	LG 3528 B105N
warranty	5 years + insurance

* at 4000 K


** Flux drop max. 20%

ORDER CODES


LINEA20 20X495 827 42XLG 24V	2700 K	00216683
LINEA20 20X495 830 42XLG 24V	3000 K	00215758
LINEA20 20X495 840 42XLG 24V	4000 K	00216684
LINEA20 20X495 865 42XLG 24V	6500 K	00216685



INTERCONNECTION
BY BOARD-TO-BOARD
LINK

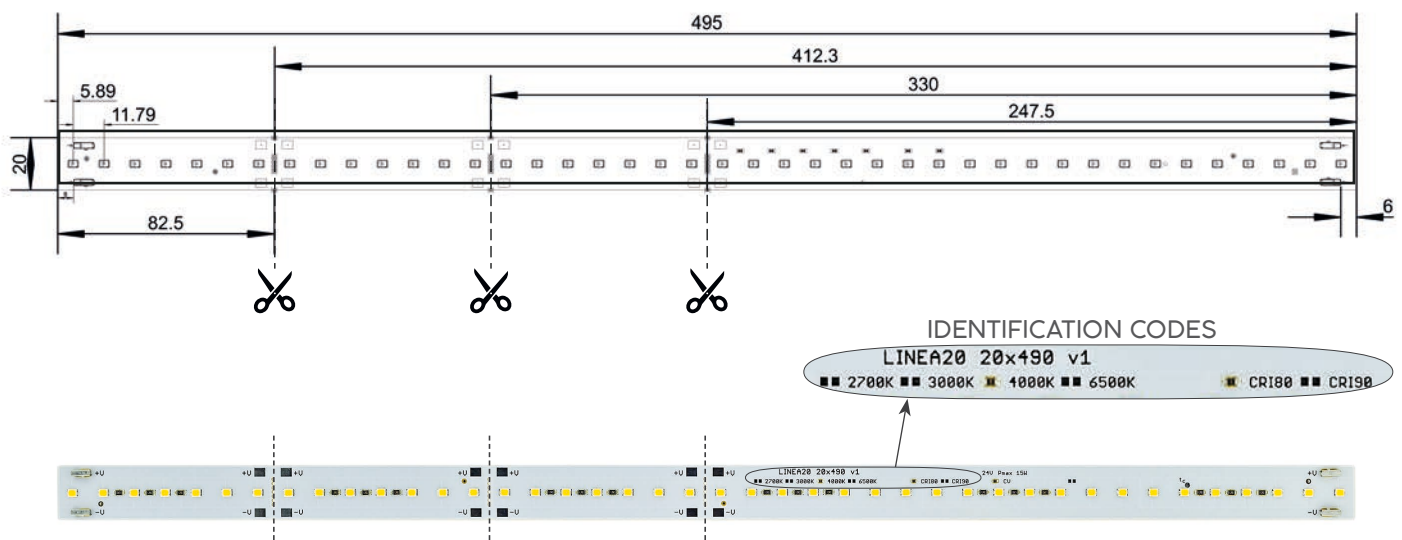

EXAMPLE OF APPLICATION - PROFILE LINEA20

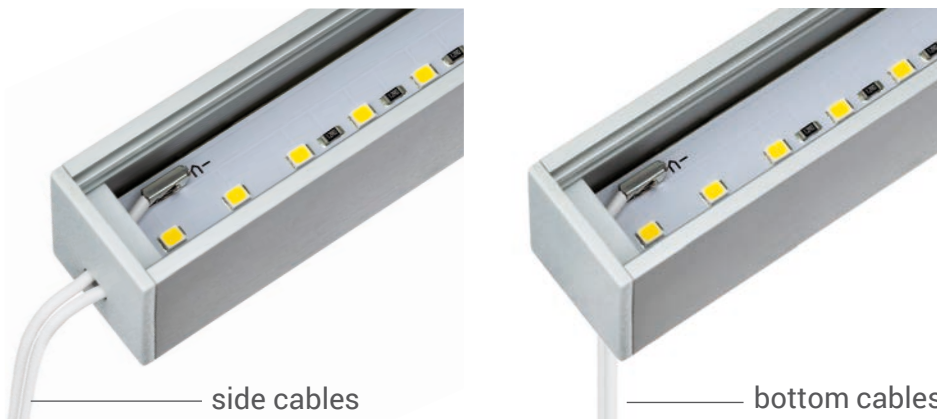


PROFILE COLORS

-  white painted
-  anodized
-  black anodized
-  raw aluminium

MOUNTING POSSIBILITIES



Slings for suspension
basic 1500mm or
SELV, 50V, 1500mm

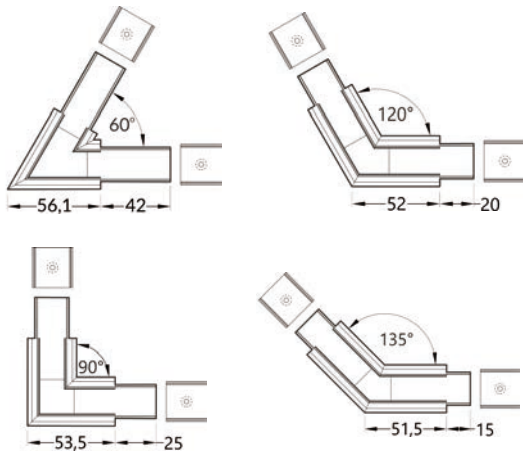

ANGLE CONNECTORS



WAGO ACCESSORIES



Operating tool
(allows to release wire from
WAGO terminal block)
00214196



Board-to-board link
00209213